


LOW VOLTAGE

NEW PRODUCT RELEASE
SEPTEMBER 2012

SPLIT CONVOLUTED TUBING

FEATURES:

- Flame retardant, Self extinguishing
- Operating Temperature: -40°C - +120°C
- UV Resistant
- Resistant to oils, acids, solvents

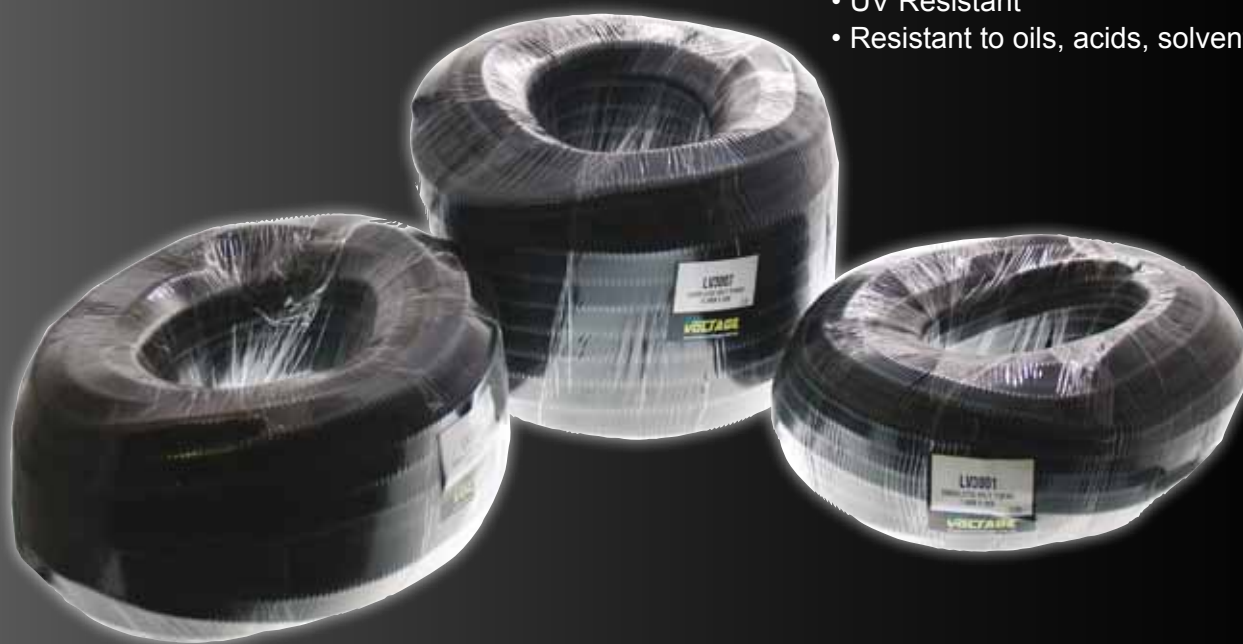

PART No.	DIA.	COLOUR	LENGTH
LV3000	7.0mm	Black	10m
LV3001			30m
LV3002			200m
LV3003	10.5mm	Black	10m
LV3004			30m
LV3005			125m
LV3006	13.0mm	Black	10m
LV3007			30m
LV3008			100m
LV3009	16.0mm	Black	10m
LV3010			30m
LV3011			100m
LV3012	20.0mm	Black	10m
LV3013			30m
LV3014			100m
LV3015	25.0mm	Black	10m
LV3016			30m