


HEATSHRINK

FEATURES:

- Flame retardant, Self extinguishing cross linked polyolefin
- Operating Temperature: -55°C to +125°C

PART No.	PRE-SHRUNK DIA.	COLOUR	LENGTH
LV3300	3mm	Black	1.2m
LV3301		Black	400m
LV3302		Red	1.2m
LV3303		Red	400m
LV3304	5mm	Black	1.2m
LV3305		Black	200m
LV3306		Red	1.2m
LV3307		Red	200m
LV3308	7mm	Black	1.2m
LV3309		Black	100m
LV3310		Red	1.2m
LV3311		Red	100m
LV3312	10mm	Black	1.2m
LV3313		Black	100m
LV3314		Red	1.2m
LV3315		Red	100m
LV3316	13mm	Black	1.2m
LV3317		Black	100m
LV3318		Red	1.2m
LV3319		Red	100m
LV3320	19mm	Black	1.2m
LV3321		Black	100m
LV3322		Red	1.2m
LV3323		Red	100m
LV3324	25mm	Black	1.2m
LV3325		Black	50m
LV3326		Red	1.2m
LV3327		Red	50m

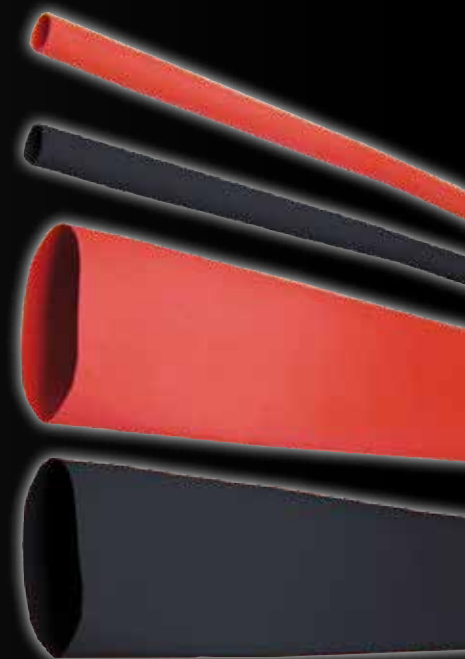


DUAL WALL HEATSHRINK

FEATURES:

- Flame retardant self extinguishing cross linked polyolefin
- Heavy Duty Heatshrink with an inner adhesive
- Operating Temperature: -55°C to +125°C




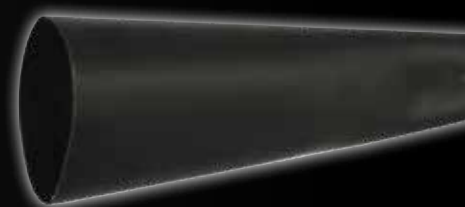












PART No.	PRE-SHRUNK DIA.	COLOUR	LENGTH
LV3350	3mm	Black	1.2m
LV3351	4.8mm	Black	1.2m
LV3352	6mm	Black	1.2m
LV3353	9mm	Black	1.2m
LV3354	12mm	Black	1.2m
LV3355	18mm	Black	1.2m
LV3356	24mm	Black	1.2m
LV3357	39mm	Black	1.2m



HEATSHRINK DISPENSER

FEATURES:

- Easy to use heatshrink dispenser
- Flame retardant self extinguishing cross linked polyolefin
- Operating Temperature: -55°C to +125°C

PART No.	PRE-SHRUNK DIA.	COLOUR		LENGTH
LV3330	3mm		Black	15m
LV3331			Red	
LV3332	5mm		Black	12m
LV3333			Red	
LV3334	7mm		Black	10m
LV3335			Red	
LV3336	10mm		Black	10m
LV3337			Red	
LV3338	13mm		Black	8m
LV3339			Red	
LV3340	16mm		Black	5m
LV3341			Red	
LV3342	19mm		Black	5m
LV3343			Red	
LV3344	25mm		Black	4m
LV3345			Red	

