

LOW VOLTAGE ZETA INDUSTRIAL SPEC

WWW.LOWVOLTAGE.NET.AU




ZETA
INDUSTRIAL SPEC

LED LIGHT BARS

2250 - 18750 LUMENS

FEATURES:

- 5 Watt Cree LED's
- 9-36 Volt DC Input
- 6063 Extruded Aluminium Housing
- Zinc Alloy End Plates and Mounts
- Anodised Polyester Powder Coat Finish
- Polycarbonate Lens & Lens Refractors
- Silicon Cable with Deutsch Connector
- Protected Against:
 - RFI/EMC
 - Voltage & Current Surge
 - Reverse Polarity
- PWM Thermal Management Regulation
- Operating Temperature: -40°C to +60°C
- IP Rating: 68

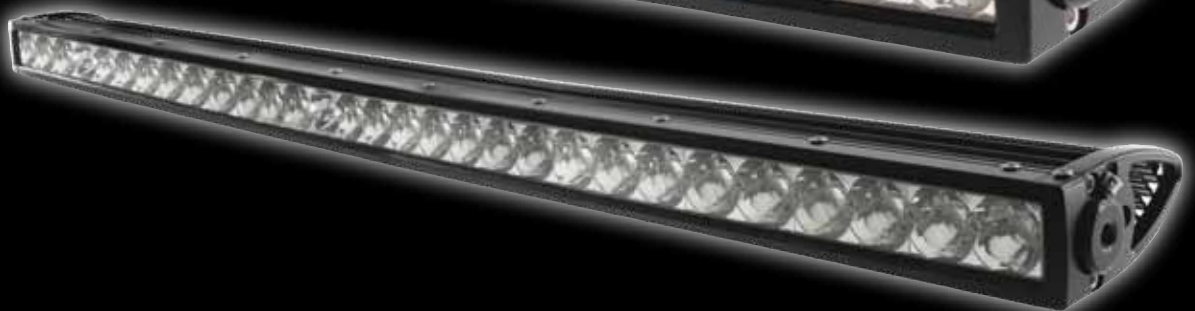



ZETA LED LIGHT BARS INDUSTRIAL SPEC

FEATURES:

- 5 Watt Cree LED's
- 9-36 Volt DC Input
- 6063 Extruded Aluminium Housing
- Zinc Alloy End Plates and Mounts
- Anodised Polyester Powder Coat Finish
- Polycarbonate Lens & Lens Refractors
- Silicon Cable with Deutsch Connector
- Protected Against:
 - RFI/EMC
 - Voltage & Current Surge
 - Reverse Polarity
- PWM Thermal Management Regulation
- Operating Temperature: -40°C to +60°C
- IP Rating: 68



Part No.	Beam Type	No. of LED's	Power	Lumens	Current Draw 12V / 24V	Dimensions
LV0136	Flood	6	30 Watt	2250	1.65 / 0.93 Amp	150 x 41 x 84.5mm
LV0136S	Spot	6	30 Watt	2250	1.65 / 0.93 Amp	150 x 41 x 84.5mm
LV0137	Flood	10	50 Watt	3750	3.30 / 1.40 Amp	250 x 41 x 84.5mm
LV0137S	Spot	10	50 Watt	3750	3.30 / 1.40 Amp	250 x 41 x 84.5mm
LV0138	Flood	20	100 Watt	7500	6.50 / 2.90 Amp	500 x 41 x 84.5mm
LV0138C	Compound	20	100 Watt	7500	6.50 / 2.90 Amp	500 x 41 x 84.5mm
LV0138S	Spot	20	100 Watt	7500	6.50 / 2.90 Amp	500 x 41 x 84.5mm
LV0139	Flood	30	150 Watt	11250	9.50 / 4.50 Amp	750 x 41 x 84.5mm
LV0139C	Compound	30	150 Watt	11250	9.50 / 4.50 Amp	750 x 41 x 84.5mm
LV0139S	Spot	30	150 Watt	11250	9.50 / 4.50 Amp	750 x 41 x 84.5mm
LV0140	Flood	40	200 Watt	15000	12.8 / 6.20 Amp	1000 x 41 x 84.5mm
LV0140C	Compound	40	200 Watt	15000	12.8 / 6.20 Amp	1000 x 41 x 84.5mm
LV0140S	Spot	40	200 Watt	15000	12.8 / 6.20 Amp	1000 x 41 x 84.5mm
LV0141	Flood	50	250 Watt	18750	15.7 / 7.70 Amp	1250 x 41 x 84.5mm
LV0141C	Compound	50	250 Watt	18750	15.7 / 7.70 Amp	1250 x 41 x 84.5mm
LV0141S	Spot	50	250 Watt	18750	15.7 / 7.70 Amp	1250 x 41 x 84.5mm




ZETA INDUSTRIAL SPEC 10 WATT LED WORK LIGHTS


FEATURES:

- 1 x 10 Watt Cree LED
- 10-36 Volt DC Input
- Die Cast Aluminium Housing
- Anodised Polyester Powder Coat Finish
- Polycarbonate Lens
- Silicon Cable with Deutsch Connector
- Protection: RFI/EMC, Voltage & Current Surge, Reverse Polarity
- IP Rating: 68
- Lumens: 900
- Can be attached in Series or Rows
- Dimensions: 60 x 60 x 76mm
- Operating Temperature: -40°C to +60°C

FLOOD BEAM:



SPOT BEAM:

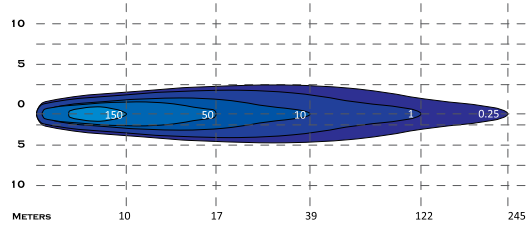

Part No.	Beam Type	Beam Pattern
LV0130	Flood	40 Degrees
LV0130S	Spot	10 Degrees


900 LUMENS

ZETA INDUSTRIAL SPEC 27 WATT LED WORK LIGHTS


FEATURES:

- 9 x 3 Watt Osram LED's
- 10-30 Volt DC Input
- Die Cast Aluminium Housing
- Anodised Polyester Powder Coat Finish
- Heavy Duty 5mm Bracket
- Polycarbonate Lens
- Silicon Cable with Deutsch Connector
- Protection: RFI/EMC, Voltage & Current Surge, Reverse Polarity
- IP Rating: 68
- Lumens: 1700
- Dimensions: 117 x 117 x 73mm
- Operating Temperature: -40°C to +60°C

FLOOD BEAM:




SPOT BEAM:

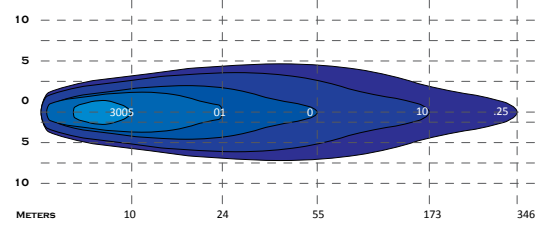

Part No.	Beam Type	Beam Pattern
LV0131	Flood	40 Degrees
LV0131S	Spot	10 Degrees

1700 LUMENS

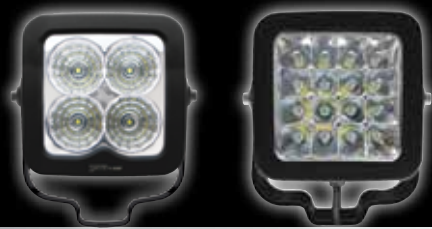


ZETA INDUSTRIAL SPEC 40 WATT LED WORK LIGHTS


FEATURES:

- 4 x 10 Watt Cree LED's
- 10-36 Volt DC Input
- Die Cast Aluminium Housing
- Anodised Polyester Powder Coat Finish
- Heavy Duty 5mm Bracket
- Polycarbonate Lens
- Silicon Cable with Deutsch Connector
- Protection: RFI/EMC, Voltage & Current Surge, Reverse Polarity
- IP Rating: 68
- Lumens: 3600
- Dimensions: 115 x 147 x 87mm
- Operating Temperature: -40°C to +60°C

FLOOD BEAM:

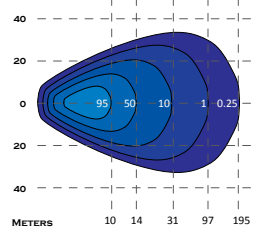

SPOT BEAM:

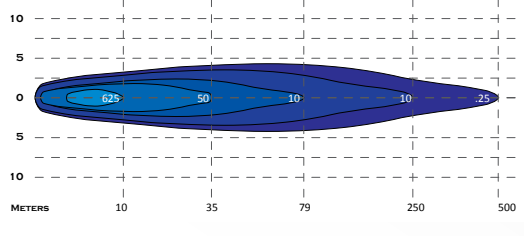

3600 LUMENS


Part No.	Beam Type	Beam Pattern
LV0132	Flood	40 Degrees
LV0132S	Spot	10 Degrees

ZETA INDUSTRIAL SPEC 48 WATT LED WORK LIGHTS

FEATURES:

- 16 x 3 Watt Osram LED's
- 10-30 Volt DC Input
- Die Cast Aluminium Housing
- Anodised Polyester Powder Coat Finish
- Heavy Duty 5mm Bracket
- Polycarbonate Lens
- Silicon Cable with Deutsch Connector
- Protection: RFI/EMC, Voltage & Current Surge, Reverse Polarity
- IP Rating: 68
- Lumens: 3520
- Dimensions: 115 x 147 x 87mm
- Operating Temperature: -40°C to +60°C

Compound BEAM:

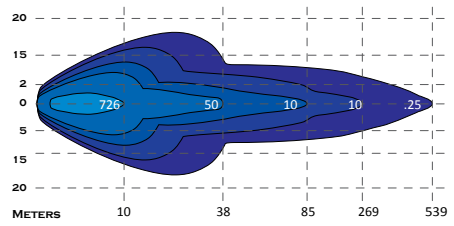

3520 LUMENS

Part No.	Beam Type
LV0135	Compound

Low VOLTAGE

Zeta
INDUSTRIAL SPEC



Zeta 60 WATT LED DRIVING / WORK LIGHTS
INDUSTRIAL SPEC


FEATURES:

- 6 x 10 Watt Cree LED's
- 10-36 Volt DC Input
- Die Cast Aluminium Housing
- Anodised Polyester Powder Coat Finish
- Heavy Duty Single Stud Mount
- Polycarbonate Lens
- Silicon Cable with Deutsch Connector
- Protection: RFI/EMC, Voltage & Current Surge, Reverse Polarity
- IP Rating: 68
- Lumens: 5400
- Dimensions: 178 x 155 x 90mm
- Operating Temperature: -40 to +60"




5400 LUMENS

FLOOD BEAM:



SPOT BEAM:

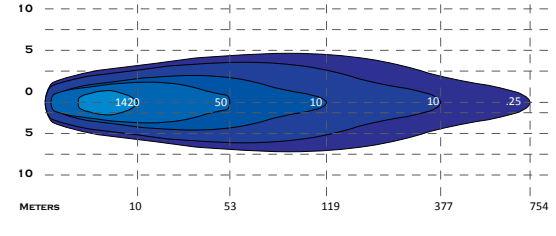

Part No.	Beam Type	Beam Pattern
LV0133	Flood	40 Degrees
LV0133S	Spot	10 Degrees



Low VOLTAGE **Zeta**
INDUSTRIAL SPEC

WWW.LOWVOLTAGE.NET.AU